



Micro Instruments

Electronic Research & Development

Innovative Electronics for a changing world

MANUAL

POE 4+4 GM



Index:

Description

Technical and connections

Screen shots

Physical

Description:

The **POE 4 +4 GM** is an 4+4 = 8 Channel Gigabit DC passive power over Ethernet injector unit with a 10Mbps management Ethernet interface to allow the user to toggle the power output of each one of the 8 POE power outputs via a web-browser interface.

POE output ports is Grouped into **Group A** (4 POE channels) and **Group B** (4 POE channels) –The user can select the **MODE** (MODE B-2 pair power or PHANTOM POWER-4 pair power) and **voltage** (24VDC or 48VDC- input dependant) for each group of 4 POE outputs individually via changing power connections at the rear of the unit.

The unit operates from 18Vdc to 60Vdc supply voltage for Group A and B .

Technical & Connections:

The unit have 8 LAN input Ports and 8 LAN + POE output ports via 70W POE+ Gigabit Ethernet transformers.

All Power output Ports on the device is protected via **1Amp** PTC thermal self recoverable fuses against short circuits and faulty equipment that might be connected to the port.

The unit controls power to each POE output port via **mechanical relays** for robustness on the power line from incoming spikes on the power line caused by ESD discharges etc.

POE Port 1 to 8 can only be toggled to break power to the POE outputs 1 to 8 to reset connected devices.

The POE port will after being toggled – automatically re-connect power to the connected device after **15 seconds** so the user can not log himself out permanently of a connection to the remote tower.

10Mbps User control Ethernet interface for remote management.

Each Port have led indication for port power status , led's also indicates if the unit is connected in MODE B- 2pair power or PHANTOM MODE-4pair power mode for POE A and POE B.

When POE A or POE B is connected in the MODE B mode – only the **green** led illuminates on the POE port

When POE A or POE B is connected in the PHANTOM mode – the **green** and **amber** led illuminates on the POE port

Rear view



POE A is the master unit and POE B is the slave unit

The unit will not work if Power is connected to POE B only – always use POE A power input

RESET

To factory reset the unit to the default 192.168.1.2 IP address , disconnect power from the unit , short circuit the 2 pins carefully as indicated by the arrow on the backside , apply power to POE A , wait 10seconds , remove the short circuit across the 2 reset pins.

Green pluggable terminals for power connection:

The unit can be powered from the **same** supply voltage or from **two different** supply voltages –see connection diagrams below

**** Reverse polarity connections could damage your POE connected equipment****

Please be careful about correct polarity when connecting the power source

Each POE group , POE A (ch1-4) and POE B (ch1-4) can be wired to function in the

(same or different modes) and the (same or different) voltages.

MODES :

MODE B = 2 pair powering over LAN cable

PHANTOM = 4 pair powering over LAN cable


Provision was made for the user to write the voltage for the POE A group and the POE B group onto the front facia of the unit to avoid confusion between different voltage supplies between the channels

Voltage outputs will be equal to voltage inputs

MODE B = POWER OVER 2 PAIRS = +4,5 and - 7,8

PHANTOM = POWER OVER all 4 pairs + 1,2,4,5 and - 3,6,7,8


POWER Connection - MODE B for POE A + POE B at the same voltage

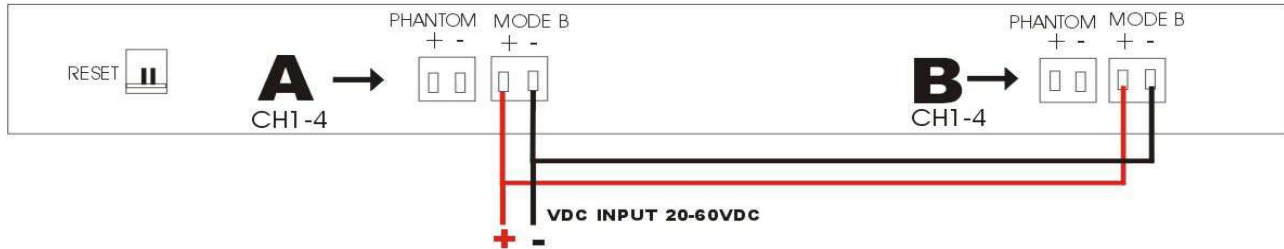

POWER Connection - MODE B for POE A + POE B at different voltages



POWER Connection - PHANTOM for POE A + POE B at the same voltage

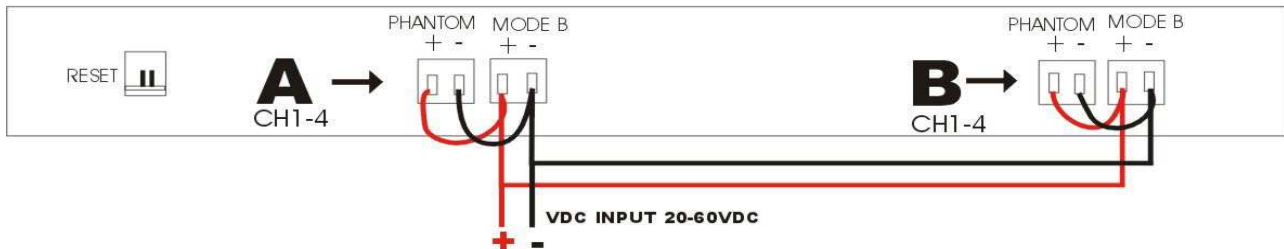


POWER Connection - PHANTOM for POE A + POE B at different voltages




PHANTOM = POWER OVER all 4 pairs + 1,2,4,5 and - 3,6,7,8

POWER Connection - MODE B for POE A and Phantom for POE B at the same voltage or vice versa

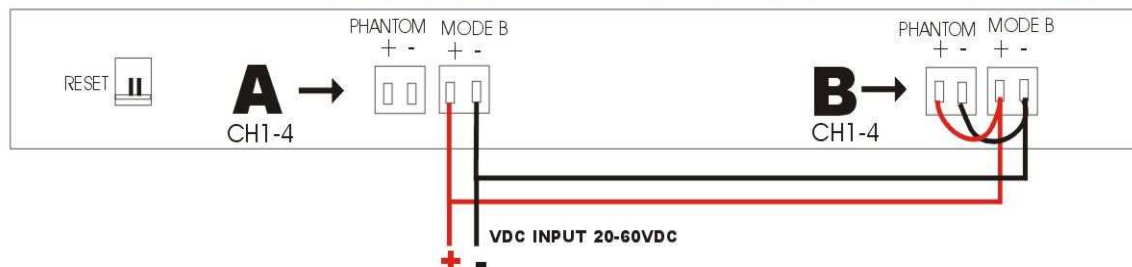

POWER Connection - MODE B for POE A and Phantom for POE B at different voltages or vice versa

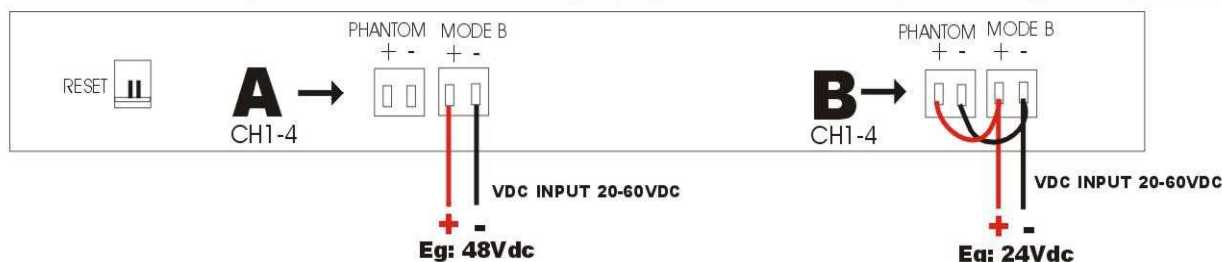

Screenshots:

Home page

Indicates PORT output power active with a green dot

POE ID – user can specify a site name for the POE 4+4GM



Managed 4+4 CH GB DC POE Injector

Home

POE ID and MODE

POE A
Control(Main)

POE B
Control(Expander)

Network
Configuration

Managed 4 + 4 CH GB DC POE injector

Stack Version: v5.36
Build Date: Jul 22 2018 /Mi 0025

POE A CH 1-4 Power



POE B CH 1-4 Power



POE ID:

Selecting any menu will bring up the password pop up

Default : admin & admin

Sign in

http://192.168.1.2

Your connection to this site is not private

Username

Password

Sign in Cancel

Stack Version: v5.36

Build Date: Jul 22 2018 /Mi 0025

DC POE Injector

1-4 Power

POE B CH 1-4 Power

POE ID:

Copyright Micro Instruments 2018

POE ID : user defined site name for the POE 4+4GM

User can enter the voltage and the mode for POE A and POE B for reference



Managed 4+4 CH GB DC POE Injector

Home

POE ID and MODE

POE A Control(Main)

POE B Control(Expander)

Network Configuration

POE IDENTIFICATION

User set name and modes for 4 + 4 POE strip

POE Site Name

POE A CH1-4 mode and voltage(Main)

POE B CH1-4 mode and voltage(expander)

POE ID(max15):

POE A CH1-4 Mode and Voltage(Main)(max15):


POE B CH1-4 Mode and Voltage(Expander)(max15):

Save

Copyright Micro Instruments 2018

POE A - PORT POWER CYCLE:

User defined Names can be specified for **PORT A** channel 1 to 4 to easily identifies connected devices to the port
 PORT A CH 1-4 can be toggled for 15 sec to reset connected devices

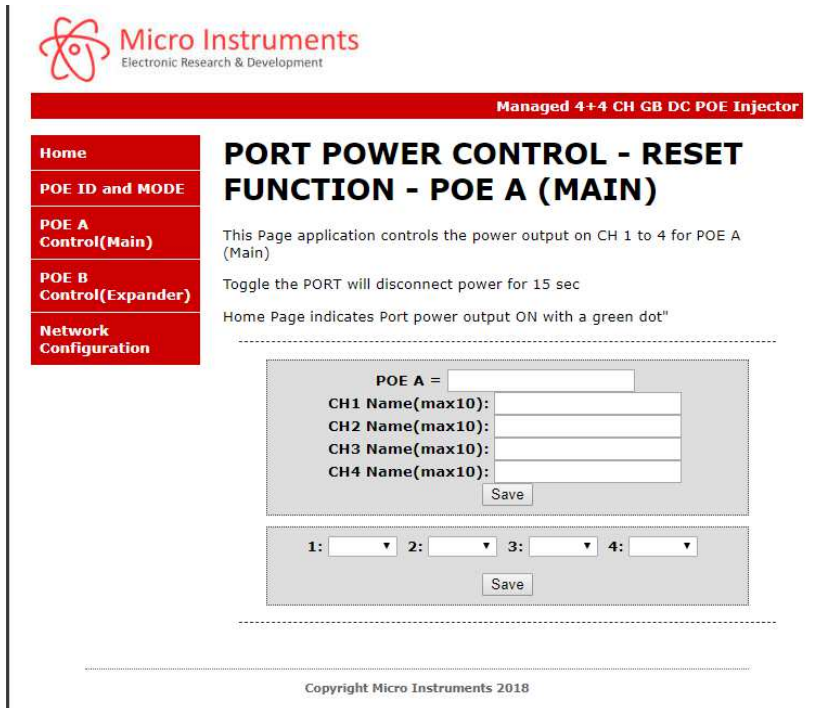

Micro Instruments
Electronic Research & Development

Managed 4+4 CH GB DC POE Injector

Home
POE ID and MODE
POE A Control(Main)
POE B Control(Expander)
Network Configuration

PORT POWER CONTROL - RESET FUNCTION - POE A (MAIN)

This Page application controls the power output on CH 1 to 4 for POE A (Main)

Toggle the PORT will disconnect power for 15 sec

Home Page indicates Port power output ON with a green dot"

POE A =

CH1 Name(max10):

CH2 Name(max10):

CH3 Name(max10):


CH4 Name(max10):

1: 2: 3: 4:

Copyright Micro Instruments 2018

POE B - PORT POWER CYCLE:

User defined Names can be specified for **PORT B** channel 1 to 4 to easily identifies connected devices to the port
 PORT B CH 1-4 can be toggled for 15 sec to reset connected devices

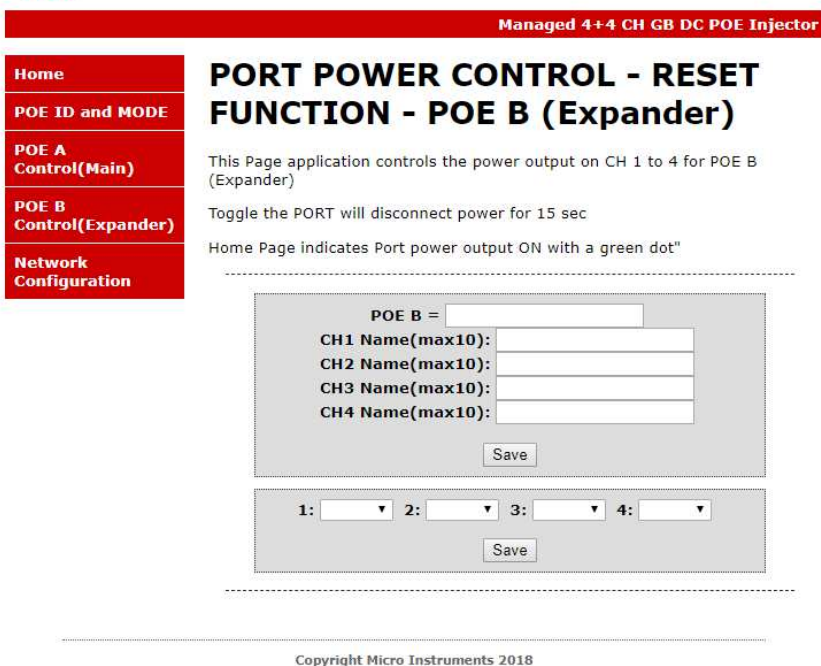Managed 4+4 CH GB DC POE Injector

Home
POE ID and MODE
POE A Control(Main)
POE B Control(Expander)
Network Configuration

PORT POWER CONTROL - RESET FUNCTION - POE B (Expander)

This Page application controls the power output on CH 1 to 4 for POE B (Expander)

Toggle the PORT will disconnect power for 15 sec

Home Page indicates Port power output ON with a green dot"

POE B =

CH1 Name(max10):

CH2 Name(max10):

CH3 Name(max10):

CH4 Name(max10):

1: 2: 3: 4:

Copyright Micro Instruments 2018

Network Configuration:

Change User defined password

Set IP address , Gateway and subnet Mask for the Ethernet interface



Managed 4+4 CH GB DC POE Injector

Home

POE ID and MODE

POE A
Control(Main)

POE B
Control(Expander)

Network
Configuration

Ethernet Configuration

This page allows the configuration of the units network settings.

CAUTION: Incorrect settings may cause the unit to lose network connectivity.

Enter the new settings/name for the unit below:

MAC Address:	00:19:F6:00:1D:C2
Host Name:	POE4+4GM
Password: [max 9]	admin
IP Address:	192.168.1.2
Gateway:	192.168.1.1
Subnet Mask:	255.255.255.0
Save Config and Reboot	

Copyright Micro Instruments 2018

Physical:

The unit is housed in a **19"** standard rack mount enclosure – the mounting flanges on the sides can be turned 90 degrees to act as mounting feet if a **19"** rack cabinet is not available.

LENGTH: 440mm

HIGHT: 45mm

WIDTH: 80mm

WEIGHT : 1.375Kg

