
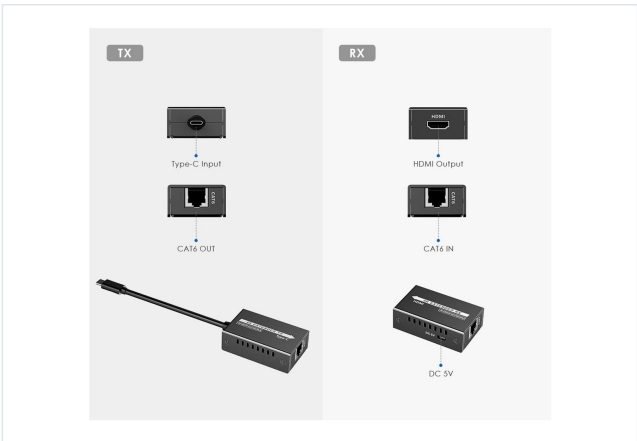


CNV-LKV600TH-L

Lenkeng 4K @ 60Hz USB-C to HDMI 60m extender

Product Overview

Lenkeng 4K @ 60Hz USB-C to HDMI 60m extender, LKV600TH-L, HDMI 2.0 Version, 18Gbps Max transmission rate, 4096x2160 @ 60Hz, HDR10 supported, HDMI 3D supported, CAT6/6A/7 cable

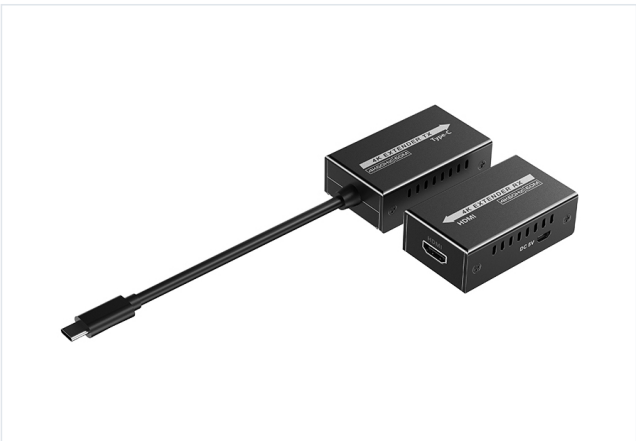

Specifications

Overview:

LKV600TH-L 4K@120Hz Type-C to HDMI Extender

Featuring a Type-C transmitter and an HDMI receiver, this product achieves zero latency transmission via CAT6/6A/7 network cable of UHD audio and video signals. It supports 4K@60Hz Type-C video signal transmission up to 60 meters and 25 meters for 4K@120Hz. A variety of applications can be achieved with this kit, such as education, training, conferences, etc.

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (<http://www.comx.co.za>), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications

Product Code	CNV-LKV600TH-L
--------------	----------------

ComX Computers

Product Specification Sheet

Voltage	TX: Power by the signal source
	RX: DC 5V500mA
Power consumption	TX < 3W, RX < 3W
HDMI version	HDMI 2.0
HDCP version	HDCP 2.2, HDCP 1.4
Max transmission rate	18Gbps
Resolution	1280x720, 1280x960, 1366x768, 1440x900, 1680x1050, 1920x1080, 1920x1200, 720p@50 / 60Hz, 1080i@50 / 60Hz, 1080p@24 / 25 / 30 / 50 / 60 / 120Hz, 2560x1440@50 / 60 / 120 / 144Hz, 3840x2160@24 / 25 / 30 / 50 / 60 / 100 / 120Hz, 4096x2160@24 / 25 / 30 / 50 / 60Hz
TMDS signal	0.7~1.2Vp-p (TMDS)
DDC signal	5Vp-p (TTL)
CAT6/6A/7 Transmission distance	4K@60Hz<=60m
	2560x1440@120/144Hz <=30m
	4K@100/120Hz<=25m
Audio formats	PCM, DTS, Dolby
HDR10	Supported
HDMI 3D	Supported
EDID passthrough	Supported, auto downscaling
Working temperature	-20~55 degreesC
Storage temperature	-30~60 degreesC
Humidity	0~90%RH (no condensation)
Material	ABS
Color	Black
Dimension	67 (L) x 38 (W) x 21 (H) mm
Weight	TX: 85g, RX: 72g
ESD protection	1a Contact discharge level 2 (+/-4KV)
	1b Air discharge level 3 (+/-8KV)
	Implementation of the standard: IEC61000-4-2

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: <https://www.comx.co.za/CNV-LKV600TH-L-Lenkeng-4K-60Hz-USB-C-to-HDMI-60m-extender-Buy-p-294862.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx.co.za/terms-of-sale.php>

PDF generated: 2026-10-18 00:30:18.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken

ComX Computers

Product Specification Sheet

to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.