


DS-7108NI-Q1/8P

Hikvision 8-ch Mini 1U 8 PoE NVR

Product Overview

Hikvision 8-ch Mini 1U 8 PoE NVR, 8-ch IP Video Input, Up to 6 MP Resolution, 1-ch HDMI Output, 1-ch VGA Output, HDMI / VGA simultaneous Output, H.265+ / H.265 / H.264+ / H.264 decoding Format, 4-ch synchronous playback, 4-ch @ 1080p 30 fps decoding capability, 16 Remote connection, 1x RJ-45 10/100 Mbps Network Interface, 8x RJ-45 10/100 Mbps PoE Ports, 1 SATA Interface up to 6TB capacity, 2x USB 2.0

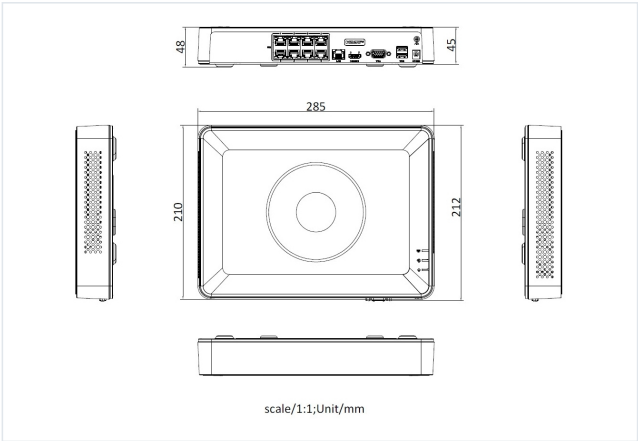

Specifications

Overview:

DS-7108NI-Q1/8P - 8-ch Mini 1U 8 PoE NVR

- H.265+/H.265/H.264+/H.264 video compression
- Up to 60 Mbps incoming bandwidth, and 60 Mbps outgoing bandwidth
- Up to 8-ch network camera inputs
- Up to 4-ch 1080p decoding capability
- HDMI and VGA simultaneous output

Specifications:

© 2023 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.	
Specifications	
Product Code	DS-7108NI-Q1/8P
Video And Audio	
IP Video Input	8-ch
	Up to 6 MP resolution
Incoming Bandwidth	60 Mbps
Outgoing Bandwidth	60 Mbps
HDMI Output	1-ch, 1920 x 1080p/60Hz, 1600 x 1200/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz

ComX Computers

Product Specification Sheet

VGA Output	1-ch, 1920 x 1080p/60Hz, 1600 x 1200/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz
Video Output Mode	HDMI/VGA simultaneous output
Decoding	
Decoding Format	H.265+/H.265/ H.264+/H.264
Recording Resolution	6 MP / 4 MP / 3 MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Synchronous Playback	4-ch
Decoding Capability	4-ch@1080p (30 fps) or 2-ch@4 MP (30 fps) or 1-ch@6 MP (30 fps)
Stream Type	Video, Video & Audio
Network	
Remote Connection	16
Network Protocol	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP
Network Interface	1, RJ-45 10/100Mbps self-adaptive Ethernet interface
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	<= 75 W
Standard	IEEE 802.3 af/at
Auxiliary Interface	
SATA	1 SATA interface
Capacity	Up to 6TB capacity for each disk
Alarm In/Out	N/A
USB Interface	Rear panel: 2 x USB 2.0
General	
Power Supply	48 VDC, 1.8 A
Consumption	<= 10 W
Working Temperature	-10 to +55° C (+14 to +131° F)
Working Humidity	10% to 90%
Dimension (W x D x H)	285 x 210 x 48 mm(11.2" x 8.3" x 1.9")
Weight	<= 1 kg (2.2 lb)
Certification	
CE	EN50130-4, EN 61000-3-2, EN 61000-3-3

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: <https://www.comx.co.za/DS-7108NI-Q1-8P-Hikvision-8-ch-Mini-1U-8-PoE-NVR-Buy-p-283081.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx.co.za/terms-of-sale.php>

PDF generated: 2026-10-13 02:03:46.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.