


MT-RBGPEN21

MikroTik GPEN21 Smart PoE injector with SFP

Product Overview

MikroTik GPEN21 Smart PoE injector with SFP, 2 DC inputs (DC jack / PoE-in), 802.3af/at PoE in, 12-57 V PoE in Input Voltage, 2x Gigabit Ethernet Ports, 1x 1G Ethernet Ports with PoE-out, 1x SFP Ports

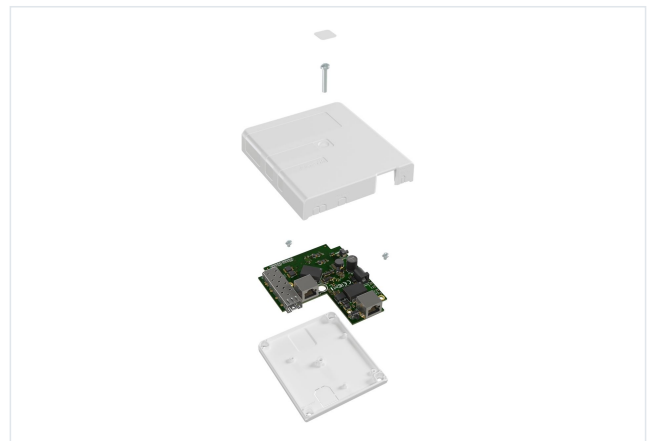

Specifications

Overview:

GPEN21

Smart power injector that serves as an advanced software controlled repeater

The GPEN21 is a smart power injector that serves as an advanced software controlled repeater. Not only can it power your uplink devices via PoE, it can also provide a range of useful software features:

- Interface management and monitoring
- GPEN link fault detection
- VLAN support
- SNMP reporting
- Basic traffic shaping

GPEN21 has an Ethernet and SFP port for fiber connectivity. Customers can choose to use GPEN21 to power optical module for uplink to provider, or to provide PoE to power Ethernet uplink to provider (that uses our GPeR and/or netPower products)

ComX Computers

Product Specification Sheet

The GPEN unit can be securely attached to a wall or the communications cabinet. The Ethernet cable can be routed either directly through its bottom cable opening or into the wall, as preferred.

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (http://www.comx.co.za), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.	
Specifications	
Product Code	MT-RBGPEN21
Specifications	
Product code	GPEN21
Switch chip model	88E6341
Input voltage	12 - 57 V, Passive or 802.3af/at
Tested ambient temperature	-20 degreesC to 70 degreesC
	40
Powering	
Number of DC inputs	2 (DC jack, PoE-IN)
DC jack input Voltage	12-57 V
Max power consumption	30 W
Max power consumption without attachments	3 W
Cooling type	Passive
PoE in	802.3af/at
PoE in input Voltage	12-57 V
PoE-out	
PoE-out ports	Ether2
PoE out	Passive PoE up to 57V
Max out per port output (input 18-30 V)	850 mA
Max out per port output (input 30-57 V)	625 mA
Max total out (A)	850 mA
Ethernet	
10/100/1000 Ethernet ports	2
Number of 1G Ethernet ports with PoE-out	1
Fiber	
SFP ports	1
Other	

ComX Computers

Product Specification Sheet

Output Voltage	Yes, Passive PoE up to 57 V
Mode button	Yes
Certification & Approvals	
Certification	CE, EAC, ROHS
IP	IP20

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: <https://www.comx.co.za/MT-RBGPEN21-MikroTik-GPEN21-Smart-PoE-injector-with-Buy-p-304915.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx.co.za/terms-of-sale.php>

PDF generated: 2026-10-08 18:04:47.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.