


RG-RAP2260

Reyee Wi-Fi 6 AX3000 High-density Multi-G Ceiling Access Point

Product Overview

Reyee Wi-Fi 6 AX3000 High-Density Multi-G Ceiling Access Point, RG-RAP2260, 512 Client capacity, 2.97Gbps Wireless Throughput, 110 recommended Client, 1x 2.5GE Port, 1x Gigabit Port, 802.3at PoE - standard

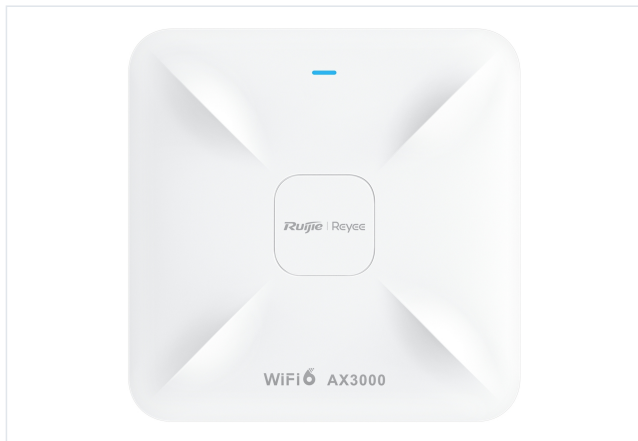

Specifications

Overview:

RG-RAP2260 Reyee Wi-Fi 6 AX3000 High Performance Multi-G Ceiling Access Point

Hotel, Restaurant, Shopping Mall, Meeting Room, Railway Station, etc.

- Ultra-high performance Wi-Fi with 2.97 Gbps throughput.
- 500+ client connections, with better multi-user experience.
- Internet access with 2.5 Gbps uplink for the future.
- Easy installation of an extra AP with Reyee Mesh Technology.
- Standalone captive portal, easy to enable Wi-Fi authentication.

Features:

Better Multi-User Experience in High-Density Scenarios

- Performance upgrades, 500+ client connections.
- Boost Your Internet Speed with 2.5 Gbps Uplink.
- Build a network for the future, protecting investments.
- Easy Installation of an Extra AP with Reyee Mesh
- No cabling, and ease of use.

Flexible Wi-Fi Authentication

Standalone captive portal, easy to enable Wi-Fi authentication based on Ruijie Cloud only.

Cloud, Make Your Business Easy

- Self-organizing Network (SON)
- Centralized Network Management
- Scenario-based Configuration
- Cloud Portal Authentication
- Remote Monitoring and Maintenance

Specifications:

© 2024 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (<http://www.comx.co.za>), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications	
Product Code	RG-RAP2260
Item	RG-RAP2260
Protocol	802.11ax (Wi-Fi 6)
MIMO	2x2 @2.4 GHz, 2x2 @5 GHz
Wireless Throughput	2.97Gbps
Client Capacity	512
Recommended Client	110
2.5GE Support	Yes
Network Ports	1 x 2.5GE, 1 x GE
PoE - Standard	802.3at
Free Cloud Management	Yes

ComX Computers

Product Specification Sheet

Self-organizing Network	Yes
-------------------------	-----

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page:

<https://www.comx.co.za/RG-RAP2260-Reyee-Wi-Fi-6-AX3000-High-density-Multi-G-Ceiling-Access-Point-p-303014.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx.co.za/terms-of-sale.php>

PDF generated: 2026-10-31 15:08:38.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.