
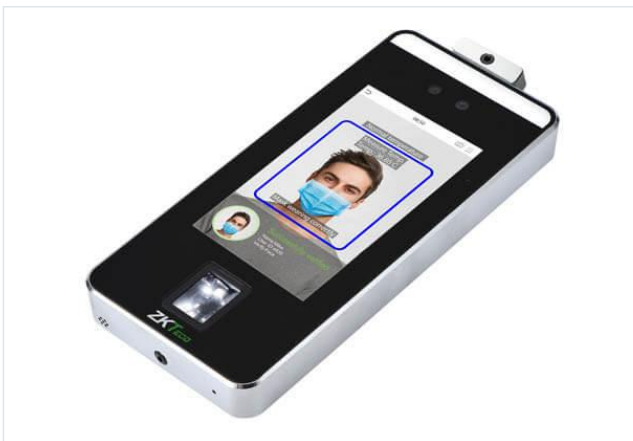


ZK-SPEEDFACE-V5L-TD

ZKTeco Temperature & Mask Detection Terminal with Facial and Palm Recognition for Access Control

Product Overview

ZKTeco SPEEDFACE-V5L-TD temperature & mask detection Terminal with facial and Palm recognition for Access Control, 5-inch Touch Screen, 6000 face capacity, 3000 Palm capacity, 30 ~ 50cm Mask detection

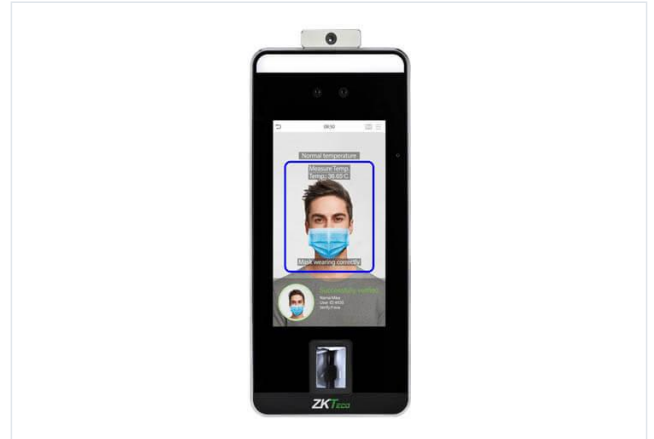

Specifications

Overview:

SpeedFace-V5L[TD]

SpeedFace-V5L [TD] is a fully upgraded version of the SpeedFace-V5L Visible Light Facial Recognition Terminal, using intelligent engineering facial recognition algorithms and the latest computer vision technology. It supports both facial and palm verification with large capacity and speedy recognition, as well as improves security performance in all aspects.

Features:

- Visible Light Facial Recognition
- Better hygiene with touchless biometric authentication, temperature detection and masked individual identification
- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack and 3D mask attack
- Card module with SpeedFace-V5L / SpeedFace-V5L[P]: 12.5 KHz EM card / 13.56MHz IC card (MF)
- Multiple Verification Methods: Face / Palm / Fingerprint / Card / Password

Specifications:

ComX Computers

Product Specification Sheet

© 2020 Respective owners and brand holders. This table has been carefully researched and generated by ComXpert International CC (<http://www.comx.co.za>), however, errors and omissions may occur. Only references to South Africa apply. All products are sourced in South Africa from the official suppliers and the warranty is that of the local supplier. E&OE. This table and our site's content may be used on condition that this notice and link remains intact and unaltered.

Specifications

Product Code	ZK-SPEEDFACE-V5L-TD
Display	5-inch Touch Screen
Face Capacity	6000
Palm Capacity	3000
Fingerprint Capacity	6,000 (Standard), 10,000 (Optional)
Transactions	200000
Operation System	Linux
Standard Functions	ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Holidays, Anti-passback
	Record Query, Tamper Switch Alarm, Multiple Verify Modes.
Hardware	900MHz Dual Core CPU, Memory 512MB RAM / 8G Flash, 2MP WDR Low Light Camera, Adjustable Light Brightness LED
Communication	TCP/IP, WiFi (Optional), Wiegand input / output, RS485
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input
Facial Recognition Speed	<=1s
Biometrics Algorithms	ZKFace V5.8 & ZKFinger V10.0 & ZKPalm V12.0
Power Supply	12V 3A
Operating Humidity	10% - 90%
Operating Temperature	16 degreesC ~ 32 degreesC (60.8 degreesF ~ 89.6 degreesF)
Dimensions (W*H*D)	91.93 * 220 * 22.5 (mm)
Supported Softwares	ZKBioAccess

Product Information Online

For the latest product information, availability and purchasing details, please visit the product page:

Product page: <https://www.comx.co.za/ZK-SPEEDFACE-V5L-TD-ZKTeco-Temperature-Mask-Detection-Buy-p-243732.php>

Images and specifications are provided for reference and are subject to change without notice. E&OE.

Terms of Use: <https://www.comx.co.za/terms-of-use.php>

Terms of Sale: <https://www.comx.co.za/terms-of-sale.php>

PDF generated: 2026-10-09 07:53:21.

This PDF was generated automatically and may include content prepared or assisted by automated or AI-based systems. While reasonable care is taken to ensure accuracy, errors or omissions may occur.

For the most current and accurate product information, please refer to the product information available on our website. If any specification or other information differs from information published elsewhere, please confirm the details with us before relying on the information or making a purchasing decision.

ComX Computers

Product Specification Sheet

If you identify an error or discrepancy, please report it to us so that we may investigate and correct it where necessary.