



AC-UPS-O2000-R Datasheet



Features

- Rack/Tower convertible design
- Online double conversion with full digital control
- Wide input voltage range:110~300Vac
- Input power factor 0.99 with PFC
- Selectable output voltage: 208/220/230/240Vac
- Smart charger design for optimized battery performance
- Maximum charging current can be expanded to 12A (Long run unit)
- Emergency power off function (EPO)
- ECO mode operation for energy saving
- Generator compatible
- Hot-Swappable battery design
- Cold start
- Intelligent fan speed regulation
- Load segment settable (Optional)
- Versatile LCD human-computer interface
- Multiple communication interface:RS232 (USB/EPO/Relay card SNMP card optional)
- Multiple protection function:short-circuit,overload,overheat, battery overcharge and overdischarge,output low voltage and fan fault alarm



Colourful LCD



Gray LCD




Blue LCD



Battery cabinet
(Optional)



Optimized battery configuration
7Ah/9Ah (12V)

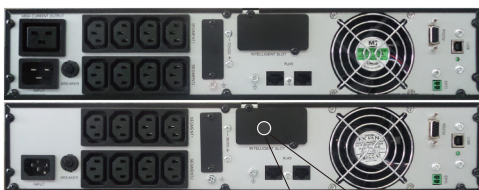

Optional socket

Relay
card

SNMP



Multifunctional
bracket



The LCD panel can
be rotated



AC-UPS-O2000-R Datasheet



Technical Specifications:

MODEL		MP RT 1k H		MP RT 1k S		MP RT 2k H		MP RT 2k S		MP RT 3k H		MP RT 3k S					
Capacity		1000VA / 900W				2000VA / 1800W				3000VA / 2700W							
INPUT																	
Nominal voltage		208/220/230/240Vac															
Input voltage range		110~300Vac (176~280Vac @ 100% load)															
Power factor		≥0.99															
FREQUENCY																	
Frequency range		40~70Hz (50/60Hz Auto-Sensing)															
OUTPUT																	
Output voltage		208/220/230/240Vac															
Voltage regulation		± 1%															
Power factor		0.9															
Output frequency	Line mode	46~54Hz or 56~64Hz															
	Bat. mode	(50/60 ± 0.1%)Hz															
Crest factor		3:1															
Harmonic distortion (THDv)		≤3% Linear load															
		≤5% Non linear load															
Transfer time	AC mode to Bat.mode	0ms															
	Inverter to Bypass	4ms (Typical)															
Output waveform		Pure Sinewave															
EFFICIENCY																	
AC mode		89%				91%				92%							
Battery mode		85%				87%				88%							
BATTERY																	
Battery number		2	3	2	3	4	6	4	6	6	8	6					
Capacity (Standard unit)		9Ah/12V (7Ah/12V optional)															
Typical recharging time		4 hours (to 90% of full capacity)															
Charging voltage		27.4Vdc ± 1%	41.1Vdc ± 1%	27.4Vdc ± 1%	41.1Vdc ± 1%	54.8Vdc ± 1%	82.2Vdc ± 1%	54.8Vdc ± 1%	82.2Vdc ± 1%	82.2Vdc ± 1%	109.6Vdc ± 1%	82.2Vdc ± 1%					
Charging current (Max.)		6A/12A		1A		6A/12A		1A		6A/12A		1A					
INDICATORS																	
LED display		Line mode,Bat.mode,ECO mode,Bypass mode,Battery low voltage,Overload & UPS fault															
LCD display		Input voltage,Input frequency,Output voltage,Output frequency,Load percentage, Battery voltage,Inner temperature& Remaining battery backup time															
ALARM																	
Battery mode		Beeping every 4 seconds															
Battery low		Beeping every second															
Overload		Beeping twice every second															
Fault		Continously beeping															
PHYSICAL																	
Dimension W x D x H (mm)		440 x 325 x 86.5			440 x 460 x 86.5		440 x 600 x 86.5		440 x 460 x 86.5		440 x 600 x 86.5						
Net weight (kg)		5.6		11.3		14		10.5		19.5		25		11		26	
ENVIRONMENT																	
Operating temperature		0℃~40℃															
Storage temperature		-25℃~55℃															
Humidity range		20~95%RH @ 0~40℃ (Non condensing)															
Altitude		<1500m,derating required when>1500m															
Noise level		<50dB at 1 Meter															
STANDARDS																	
Safety		IEC/EN62040-1,IEC/EN62477-1															
EMC		IEC/EN62040-2 IEC61000-4-2 IEC61000-4-3 IEC61000-4-4 IEC61000-4-5 IEC61000-4-6 IEC61000-4-8															

Specifications are subject to change without prior notice.
When output voltage is 208Vac,need to derate to 80% of the unit capacity.



AC-UPS-O2000-R Datasheet



MP BR 1–3kVA battery pack specification

MODEL	MP BR04024C	MP BR06036C	MP BR08048C	MP BR12072C	MP BR08096C
BATTERY SYSTEM					
Battery type	VRLA (Lead acid maintenance free battery)				
Typical battery recharging time	6~8 hours (to 90% of full capacity)				
Typical battery life	3~5 years,depend on discharing cycle and ambient temperature				
System voltage	24Vdc	36Vdc	48Vdc	72Vdc	96Vdc
Charging current (Max.)	1.4A				
Battery quantity	4	6	8	12	8
Capacity	9Ah/12V (7Ah/12V optional)				
PHYSICAL					
Dimension W x D x H (mm)	440 x 430 x 86.5		440 x 550 x 86.5	440 x 710 x 86.5	440 x 550 x 86.5
Net weight (kg)	17.4	22.5	31.5	44	31.5
ENVIRONMENT					
Safety	CE				
Operating environment	0℃~40℃				
Relative humidity	0~95% (Non condensing)				
Noise level	<40dB at 1 Meter				

Specifications are subject to change without prior notice.

Remark: MP BR08048C "MP" means series; "BR" means Battery Rack; "08" means battery number inside the Rack; "048" means the battery system voltage; "C" means the Rack coming with charger.